


# SUBMITTAL DATA SHEET

No-Lead Industrial & Specialty Valves / Fittings  
Dielectric Unions - 72110

Inlet: FNPT Thread Union, Outlet: Copper Sweat



For use wherever dissimilar metals are used in a piping system. Prevents pipe deterioration from corrosion due to galvanic and stray currents. Contact factory for repair parts.

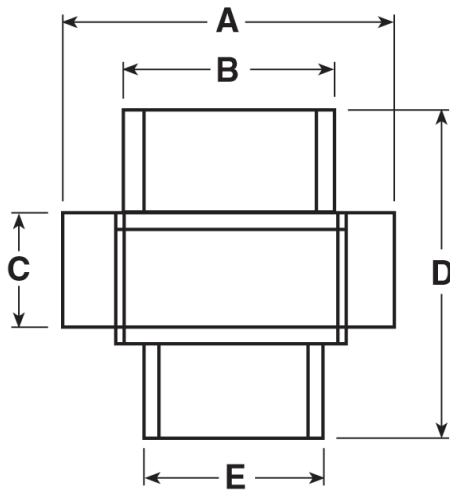

## Dimensions

Size	A	B	C	D	E
1/2"	1.63	1.04	.72	1.85	.82
3/4"	1.85	1.26	.72	2.03	1.07
3/4" x 1/2"	1.85	1.26	.72	1.89	.82
1"	2.14	1.54	.72	2.27	1.32
1 1/4"	2.56	1.86	.85	2.52	1.57
1 1/2"	2.95	2.15	.97	2.53	1.83
2"	3.76	2.74	1.06	2.85	2.38

## Materials

No.	Part	Material
1	I.P.S. Connection	Forged Steel
2	Nut	Forged Steel
3	Solder Connection	No-Lead Brass
4	Gasket	EPDM
5	Insert	ABS

## SUBMITTAL INFORMATION

- Sizes: 1/2", 3/4", 3/4" x 1/2", 1", 1 1/4", 1 1/2", 2"
- 200 PSI, 180°F maximum

**NO-LEAD:** The weighted average of the wetted surface of this no-lead product contacted by consumable water contains less than one quarter of one percent (0.25%) lead.



**A.Y. McDonald Mfg. Co.**  
P.O. Box 508  
Dubuque, IA 52004-0508

**Toll Free: 1-800-292-2737**  
**Fax: 1-800-832-9296**  
**Hours: 7:00 a.m. - 5:00 p.m., CST**

[sales@aymcdonald.com](mailto:sales@aymcdonald.com)  
[www.aymcdonald.com](http://www.aymcdonald.com)

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

**Submitted by:**